


**SWH Solar Mount End Clamp**

**MFG-PN:** MR-SW-EB-30, MR-SW-EB-30B,  
MR-SW-ED-33, MR-SW-ED-33B,  
MR-SW-EC-35, MR-SW-EC-35B,  
MR-SW-EK-40, MR-SW-EK-40B,  
MR-SW-EF-45, MR-SW-EF-45B,  
MR-SW-EE-50, MR-SW-EE-50B

**Domestic Content**

**MFG-PN:** MR-SW-EC-35-US, MR-SW-EC-35B-US

- **End clamp material:** 6005-T5 extruded aluminum alloy
- **Finish:** Clear or black anodized
- **Bolt & nut material:** 304 stainless steel and/or 316 stainless steel
- **End clamp weight:** Varies based on height: 0.052-0.06 lbs
- Assemble end clamp with one ¼”-20 T-bolt and one ¼”-20 ASTM F594 serrated flange nut.  
Use anti-seize and tighten to 10 ft-lbs of torque.
- Modules must be installed at least 1.5” from either end of a SWH solar mount rail.

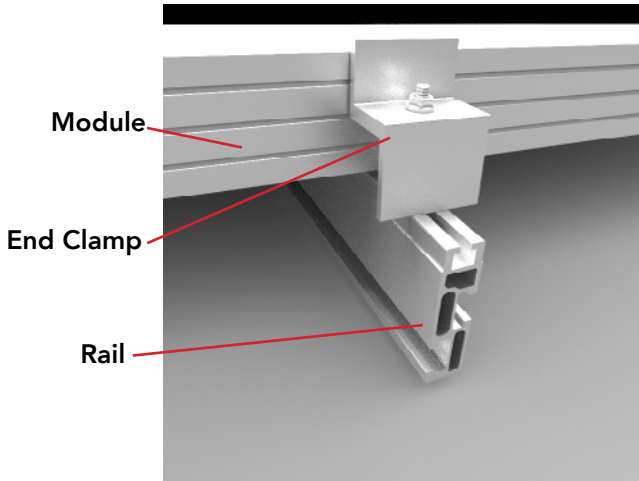


CONFORMS TO  
**UL 2703**

ETL CLASSIFIED




**Intertek**  
4009330

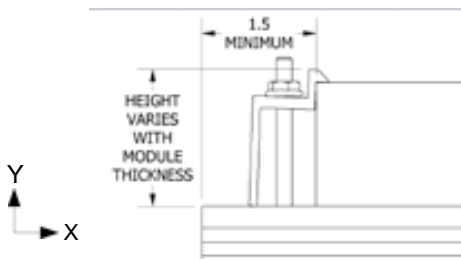

Dimensions specified in inches unless noted

Part Name	Part Number	Range of Heights (mm)	Weight (lbs) (without Hardware)
“B” end clamp	MR-SW-EB-30	29-31	.050
“B” black end clamp	MR-SW-EB-30B	29-31	.050
“D” end clamp	MR-SW-ED-33	32-34	.052
“D” black end clamp	MR-SW-ED-33	32-34	.052
“C” end clamp	MR-SW-EC-35	34-36	.054
“C” black end clamp	MR-SW-EC-35B	34-36	.054
“K” end clamp	MR-SW-EK-40	39-41	.056
“K” black end clamp	MR-SW-EK-40B	39-41	.056
“F” end clamp	MR-SW-EF-45	44-46	.058
“F” black end clamp	MR-SW-EF-45B	44-46	.058
“E” end clamp	MR-SW-EE-50	49-51	.060
“E” black end clamp	MR-SW-EE-50B	49-51	.060

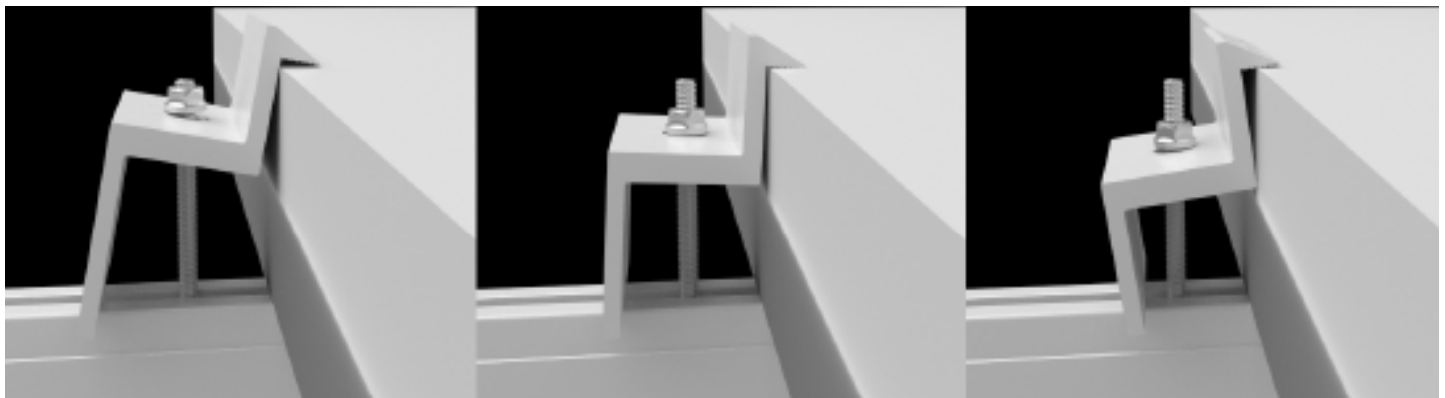

**END CLAMP IS TOO LONG**

**CORRECT FIT**

**END CLAMP IS TOO SHORT**