


## SWH Solar Mount Standoff Kit

MFG-PN: MR-SW-HP-35S, MR-SW-HP-35SB,  
MR-SW-HP-5S, MR-SW-HP-5SB

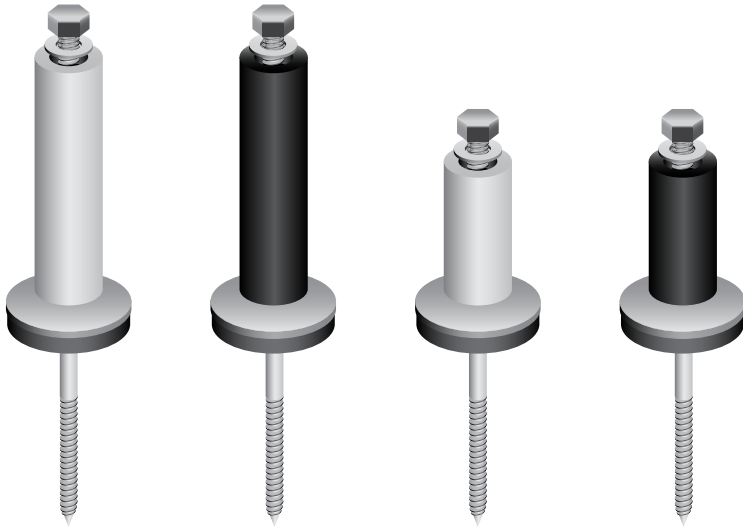

MR-SW-HP-5S      MR-SW-HP-5SB      MR-SW-HP-35S      MR-SW-HP-35SB

### 3.5" & 5" Standoff Materials:

- 6061-T6 extruded aluminum alloy
- Mill finish or coated black

### Hardware Materials:

- 304 stainless steel
- Tighten 3/8" hex nut to L-bracket to 14 ft-lbs torque

### Kit Includes:

- 3.5" or 5" x 1"OD solid coated aluminum standoff
- 5/16" x 5" SS hanger bolt
- 3/8" x 1" SS hex bolt
- 3/8" SS flat washer
- 1.5" x 5/16" x 1/8" SS heavy flat washer
- 1.5" x 5/16" x 1/8" rubber gasket

\*Illustration not to scale

CONFORMS TO  
**UL 2703**  
ETL CLASSIFIED



**Intertek**  
4009330

**Table 11: Lag- pull-out (withdrawal) capacities (lbs) in typical roof lumber (ASD)**

Sources: American Wood Council, NDS 2018, Table 12.2A and 12.3.3A.

Courtesy, American Wood Council, Leesburg, VA.

AWC Table 12.2A Lag Screw Reference Withdrawal Values, W<sup>1</sup>

Tabulated withdrawal design values (W) are in pounds per inch of thread penetration into side grain of wood member. Length of thread penetration in main member shall not include the length of the tapered tip (see 12.2.1.1).

Specific Gravity, G <sup>2</sup>	Lag Screw Diameter, D										
	1/4"	5/16"	3/8"	7/16"	1/2"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"
0.73	397	469	538	604	668	789	905	1016	1123	1226	1327
0.71	381	450	516	579	640	757	868	974	1077	1176	1273
0.68	357	422	484	543	600	709	813	913	1009	1103	1193
0.67	349	413	473	531	587	694	796	893	987	1078	1167
0.58	281	332	381	428	473	559	641	719	795	869	940
0.55	260	307	352	395	437	516	592	664	734	802	868
0.51	232	274	314	353	390	461	528	593	656	716	775
0.50	225	266	305	342	378	447	513	576	636	695	752
0.49	218	258	296	332	367	434	498	559	617	674	730
0.47	205	242	278	312	345	408	467	525	580	634	686
0.46	199	235	269	302	334	395	453	508	562	613	664
0.44	186	220	252	283	312	369	423	475	525	574	621
0.43	179	212	243	273	302	357	409	459	508	554	600
0.42	173	205	235	264	291	344	395	443	490	535	579
0.41	167	198	226	254	281	332	381	428	473	516	559
0.40	161	190	218	245	271	320	367	412	455	497	538
0.39	155	183	210	236	261	308	353	397	438	479	518
0.38	149	176	202	227	251	296	340	381	422	461	498
0.37	143	169	194	218	241	285	326	367	405	443	479
0.36	137	163	186	209	231	273	313	352	389	425	460
0.35	132	156	179	200	222	262	300	337	373	407	441
0.31	110	130	149	167	185	218	250	281	311	339	367

1. Tabulated withdrawal design values, W, for lag screw connections shall be multiplied by all applicable adjustment factors (see Table 11.3.1).  
2. Specific gravity, G, shall be determined in accordance with Table 12.3.3A.

AWC Table 12.3.3A Assigned Specific Gravities


Species Combination	Specific Gravity, G	Species Combination of MSR and MEL Lumber	Specific Gravity, G
Alaska Cedar	0.47	Douglas Fir-Larch	0.50
Alaska Hemlock	0.46	E=1,000,000 psi and lower grades of MER	0.50
Alaska Spruce	0.49	E=1,000,000 psi grades of MER	0.51
Alaska Yellow Cedar	0.46	E=1,100,000 psi grades of MER	0.52
Aspen	0.31	E=1,200,000 psi grades of MER	0.53
Balsam Fir	0.38	E=1,300,000 psi grades of MER	0.54
Bowl-Rock-Hickory	0.71	E=2,400,000 psi grades of MER	0.55
Coast Hills Spruce	0.39	Douglas Fir-Larch (North)	
Concordwood	0.41	E=1,400,000 psi and lower grades of MER and MEL	0.49
Douglas Fir-Larch	0.50	E=1,500,000 psi to 2,200,000 psi grades of MER and MEL	0.53
Douglas Fir-Larch (North)	0.49	E=2,300,000 psi and higher grades of MER and MEL	0.57
Douglas Fir-South	0.48	Douglas Fir-Larch (South)	
Eastern Hemlock	0.41	E=1,600,000 psi and higher grades of MER	0.48
Eastern Hemlock-Balsam Fir	0.36	E=1,400,000 psi and lower grades of MER	0.38
Eastern Hemlock-Tannock	0.41	E=1,400,000 psi and higher grades of MER	0.48
Eastern Hemlock-Tannock (North)	0.47		
Eastern Sitka Spruce	0.36	Heck Fir	
Eastern Spruce	0.41	E=1,500,000 psi and lower grades of MER	0.43
Eastern White Pine	0.38	E=1,600,000 psi grades of MER	0.44
Engelmann Spruce-Landslide Pine	0.38	E=1,700,000 psi grades of MER	0.45
Heck Fir	0.43	E=1,800,000 psi grades of MER	0.46
Hem-Fir (North)	0.46	E=1,900,000 psi grades of MER	0.47
Mixed Maple	0.55	E=2,000,000 psi grades of MER	0.48
Mixed Oak	0.68	E=2,100,000 psi grades of MER	0.49
Mixed Softwood Pine	0.51	E=2,200,000 psi grades of MER	0.50
Mountain Hemlock	0.47	E=2,300,000 psi grades of MER	0.51
Northern Pine	0.42	E=2,400,000 psi grades of MER	0.52
Northern Red Oak	0.68	Heck Fir (North)	
Northern Spruce	0.35	E=1,000,000 psi and higher grades of MER and MEL	0.46
Northern White Cedar	0.31	Softwood Pine	
Ponderosa Pine	0.43	E=1,700,000 psi and lower grades of MER and MEL	0.55
Red Maple	0.58	E=1,800,000 psi and higher grades of MER and MEL	0.57
Red Oak	0.67	Spruce-Pine-Fir	
Red Pine	0.44	E=1,700,000 psi and lower grades of MER and MEL	0.42
Redwood	0.37	E=1,800,000 psi and 1,900,000 grades of MER and MEL	0.46
Sitka Spruce	0.43	E=1,900,000 psi and higher grades of MER and MEL	0.50
Softwood Pine	0.55	Spruce-Pine-Fir (North)	
Spruce-Pine-Fir	0.42	E=2,000,000 psi and lower grades of MER	0.36
Spruce-Pine-Fir (South)	0.36	E=2,000,000 psi and 2,000,000 grades of MER	0.42
Western Cedars	0.36	E=2,000,000 psi and higher grades of MER	0.50
Western Cedar (North)	0.35	Western Cedars	
Western Hemlock	0.47	E=2,000,000 psi and higher grades of MER	0.36
Western Hemlock (North)	0.46	Western Woods	
Western Juniper	0.42	E=2,000,000 psi and higher grades of MER	0.36
Western White Pine	0.40		
White Oak	0.38		
Yellow Poplar	0.42		

1. Specific gravity, G, based on weight and volume when oven-dry. Different specific gravities, G, are possible for different grades of MER and MEL lumber (see Table 4C, Footnote 2).

## Axial Load Capacity

**Note:** Loads are given for standoff only. Check load limits for lag screw or other attachment methods

Part	Average Ultimate Load (lbs) Y±	Average Ultimate Load (lbs) Z±	Standoff Dimension OD x H	Assembled Weight
MR-SW-HP-35S	893	8601	1" x 3.5"	0.444 lbs
MR-SW-HP-5S	928	9007	1" x 5"	0.562 lbs



\*Independent Laboratory Tested